


384.2

Medidores de panel digital

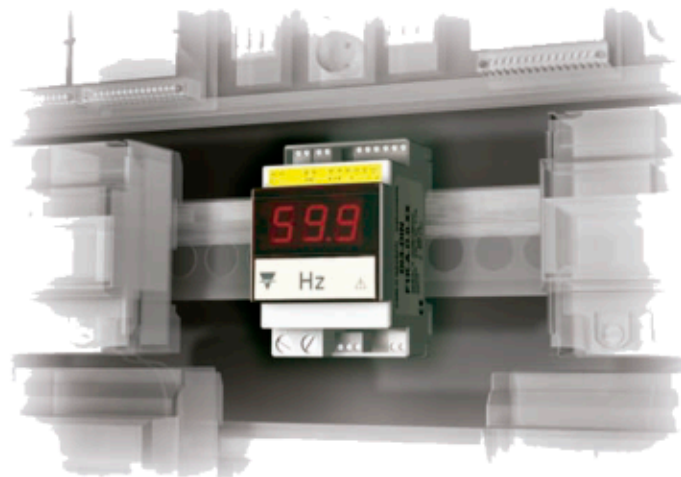


DI3 DIN DI3 72 LDI3 LDM30

Con sólo cuatro modelos básicos, esta familia de productos es la solución ideal para las personas con valor en la mente.

La filosofía de producto cumple con los requisitos del usuario en términos de características y flexibilidad.

DI3 DIN DI3 72 LDI3 LDM30

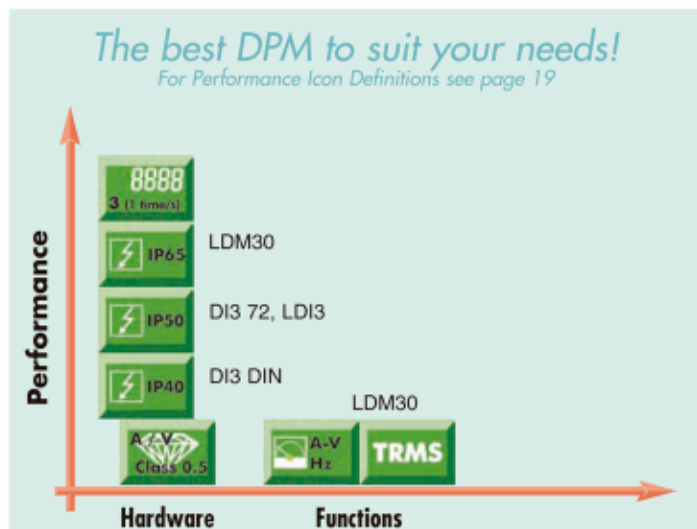

Description	3-DGT μ P-based indicator
Housing (H x W x D)	89 x 53.5 x 58.8 mm (DIN) 72 x 72 x 75 mm (72) 48 x 96 x 83 mm (LDI3)
Mounting	DIN rail, panel mounting (72, LDI3, LDM30)
Display type	DI3, LDI3: 3 DGT, red LED; LDM30: 3 DGT+ dummy zero
Variables on display	YES
Measured signals	1A/60mV/100-500VDC 1A/100VAC, 5A/500VAC 1 to 1000Hz
Type signals	DC or AC
Engineering units	mA, A, V, Hz
Accuracy	$\pm(0.5\%FS, + 1DGT)$
Temperature drift	$\pm 350ppm/^{\circ}C$
Sampling rate	1 time/second
Command inputs	Not available
Outputs:	Alarm: Not available Analog: Not available Serial: Not available
Signal/display scaling	YES (CT and VT/PT sel. by dip-switch)
Power supply	24V, 48V, 115V, 230V AC
Approvals	DI 3 72: CE, cCSAus; DI3-DIN: CE LDI3: CE, cCSAus LDM30: CE, cURus, cCSAus
Protection degree	IP40 (DIN); IP50 (72), IP50 (LDI3), IP65 (LDI3 on request; LDM30)

To instantly view a data sheet and specify products, visit www.GavazziOnline.com